


タカブレンHV吸湿データー

2009/9/28

吸湿率	1日後	2日後	3日後	4日後	7日後	8日後	9日後	10日後	11日後	14日後
① 4t+4t 穴なし	1.5%	3.1%	4.5%	5.8%	9.3%	10.3%	11.2%	12.2%	13.0%	15.1%
② 4t+4t 2φ穴	8.0%	13.8%	18.6%	19.1%	19.1%	19.3%	19.2%	19.2%	19.1%	19.0%
③ 4t+4t パンチ穴	21.4%	21.8%	21.5%	21.3%	21.0%	20.9%	20.9%	20.9%	20.8%	20.7%
④ 4t+2t 穴なし	2.5%	4.6%	6.7%	8.6%	13.2%	14.4%	15.5%	16.3%	17.0%	17.7%
⑤ 4t+2t 2φ穴	14.1%	16.8%	17.6%	17.4%	17.2%	17.1%	17.1%	17.0%	16.9%	16.7%
⑥ 乾燥剤単体	23.2%	22.6%	22.4%	22.0%	21.8%	21.5%	21.6%	21.6%	21.5%	21.2%

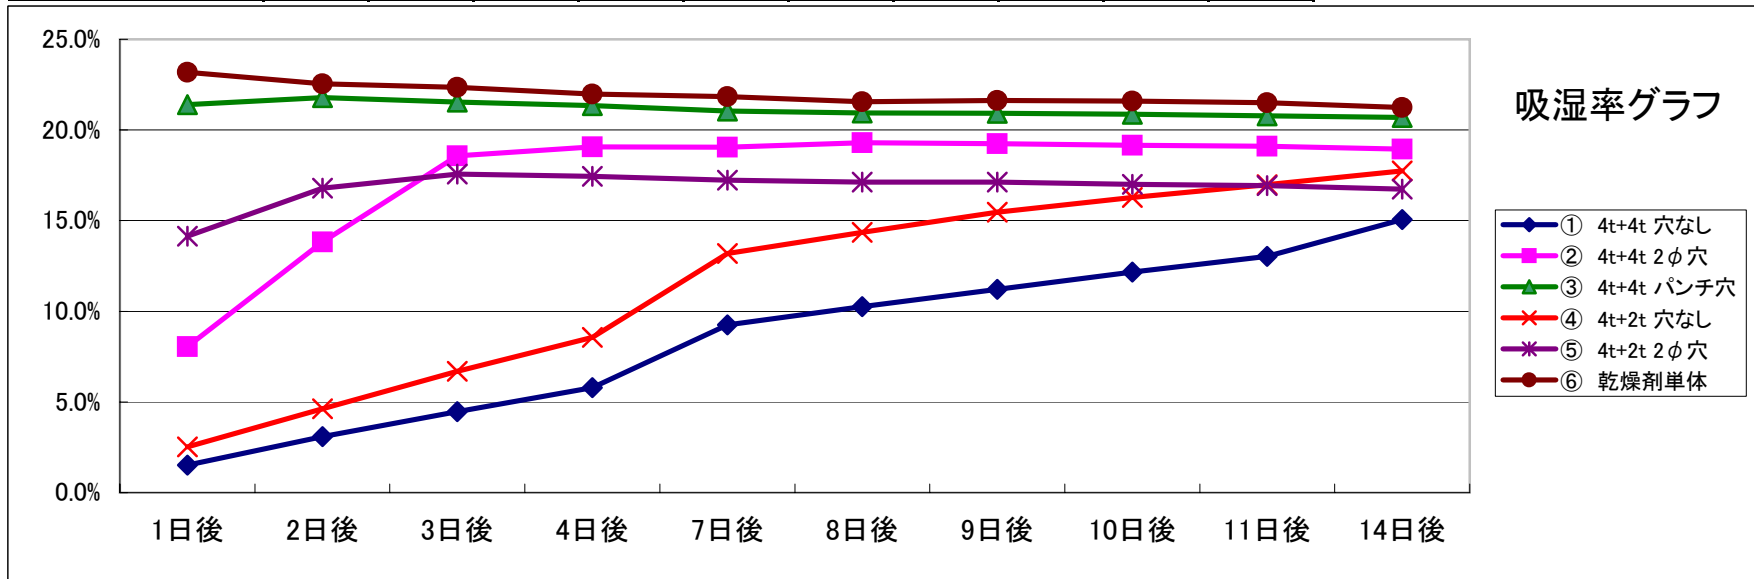

《試料》

○乾燥剤 ASW1506 (1.2g品)

○発泡シート PE67倍発泡品 ※厚みは上記表の通り

《試験環境》

○25℃ 相対湿度 90%